



NEW PRODUCT

H300 Platform

- *More Fashion and Elegant with Aluminum Glass shaft*
- *More safety, with more sensitive border switch*
- *More silent and comfortable by Continental belt*
- *Stable Control system by Monarch*




KEY TECHNICAL DATA

technical specifications

Category	value
Drive system	PolyRope Belt (Continental, Germany)
Rated speed	0.25m/s
Travel height	2.3m-18m
Number of stops	Max. 6 stops per lift
Number of doors	Max. 6 doors per lift
Type of accesses	frontal, lateral, opposite or adjacent pit
Shaft top height	65mm 2610mm
Emergency lowering	ARD
Control voltage	24V
motor	1.1kw
Power supply	1-phase 220 V 50Hz 20 A
Rated load	250kg/320 kg according to platform dimensions
Control cabinet size	300mmx1100mmx160mm

FULL HEIGHT PANEL

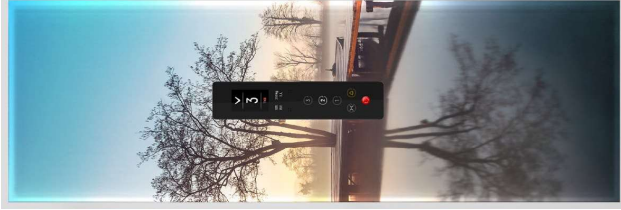


FLOOR AND ROOF

PVC floor



Roof

Std



Option



LIGHTING AND COP/LOP

Ambient light




Warm

White

Cold

COP/LOP

COP

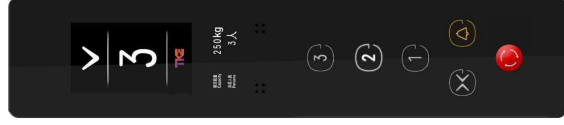

Std



Option

LOP



Std



DOORS AND DOOR HANDLES

Semi-automatic door



Equipped with door handle

Automatic door



Door handle is optional


Automatic Central opening door



DIMENSIONAL REFERENCES

See size table for details

Access B – Semi-automatic door

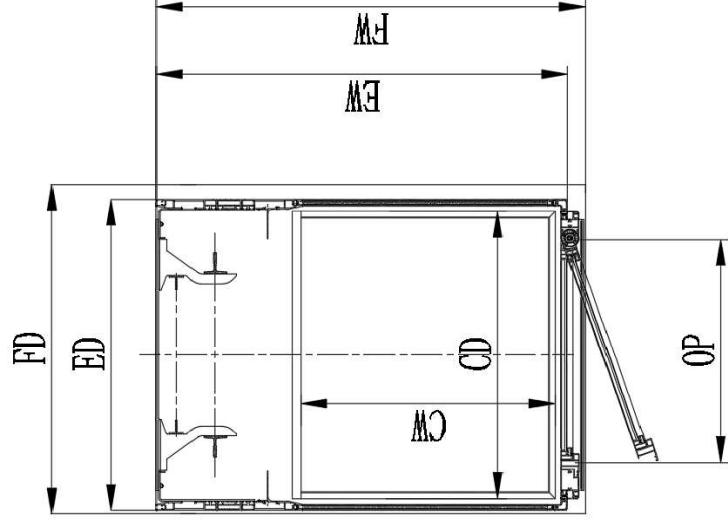

CW mm	CD mm	EW mm	ED mm	FW mm	FD mm	OP mm	LOAD kg
510	900	1025	975	1045	995	650	250
880	1000	1395	1075	1415	1095	750	250
1030	1250	1545	1325	1565	1345	950	320


┌ SUMMARY

◆ Production Highlights

- Core sparts from outstanding company
 - ✓ Belt/Rope
 - ✓ Control system
- Excellent Cabin Design
- Advanced Technology
 - ✓ Grating ruler: More stable and smoother, Less faults
 - ✓ STO: More silent control system

SUMMARY

◆ Quality First

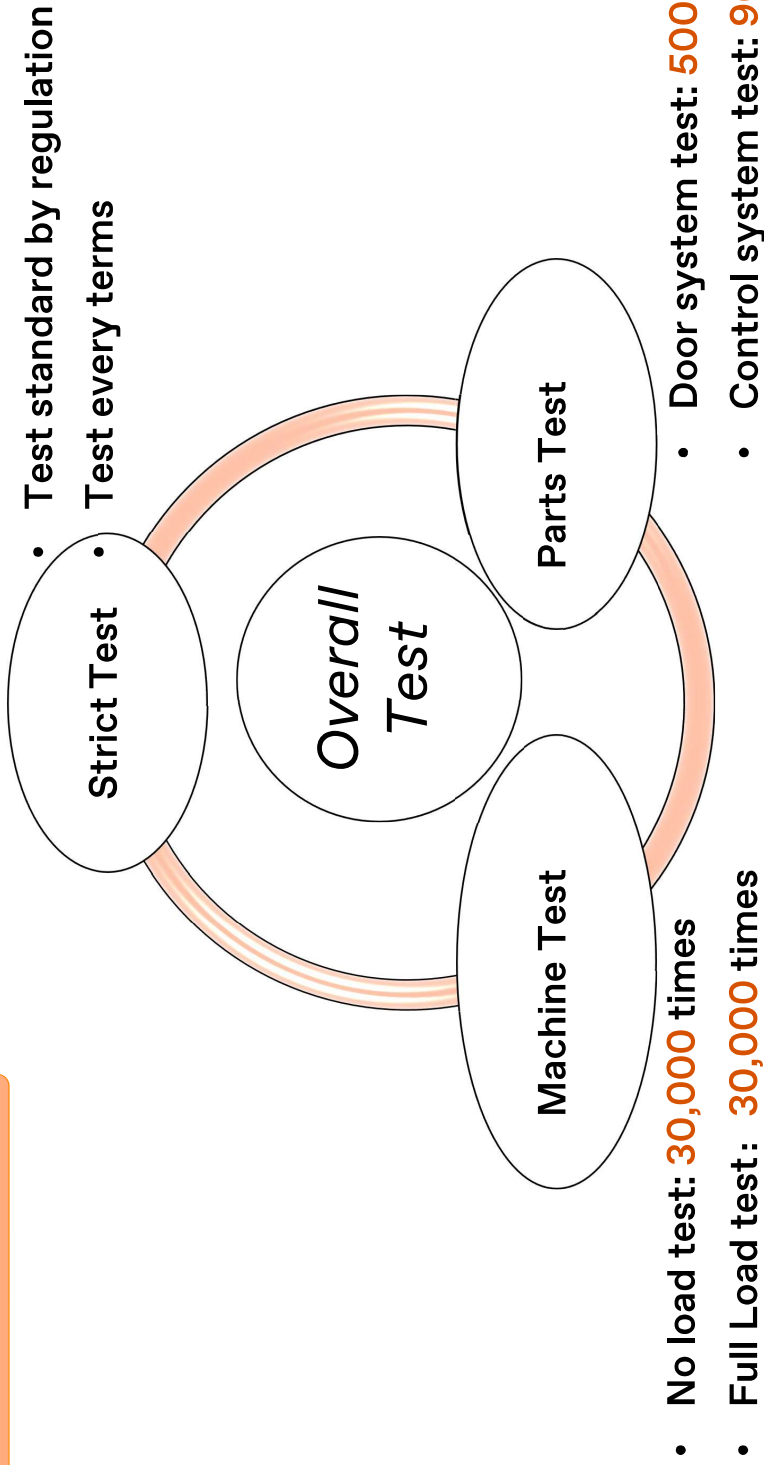


CNAS\ETC Test Report



SUMMARY

◆ Advanced Factory Management

- ISO 9001 : 2015
- ISO 14001 : 2015
- ISO 45001 : 2018

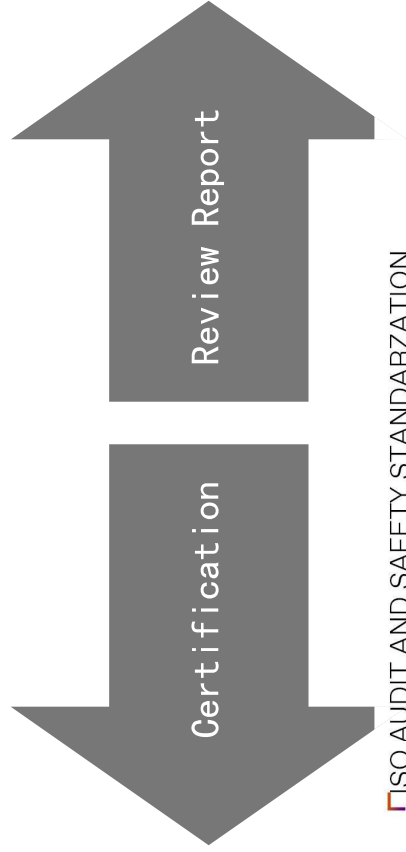

ISO AUDIT AND SAFETY STANDARDIZATION



ISO system audit



Safety Standardization Certificate level III

TRK

MOVE

BEYOND